


Setting up Bluetooth on the MC3100

This document describes the pairing of a Motorola MC3100 to a Zebra Printer.

Tap on the icon in the tray and select “Show BTE Explorer”



Click File | New Connection

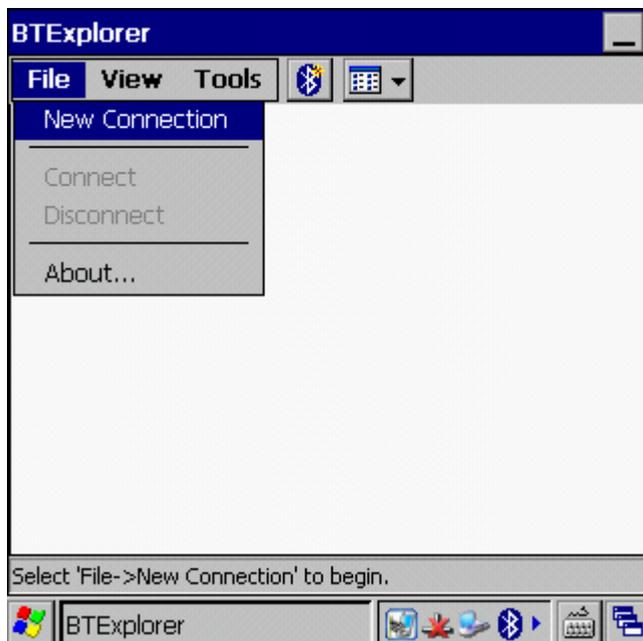


Tap "Next ->"



It will show:



Then show:

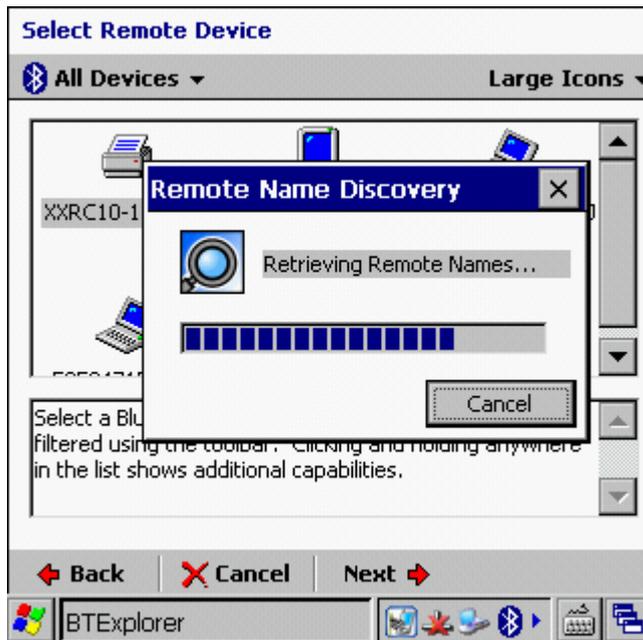


Zebra printers will appear with a name like XXRC10-18-0015 which happens to be the serial number of the device which can be found as a barcode on the bottom of the device.


Select the XXRC10-xx-xxxx device and tap "Next ->"



You will see a wait cursor, then the following screen will be shown. Tap “Next ->”

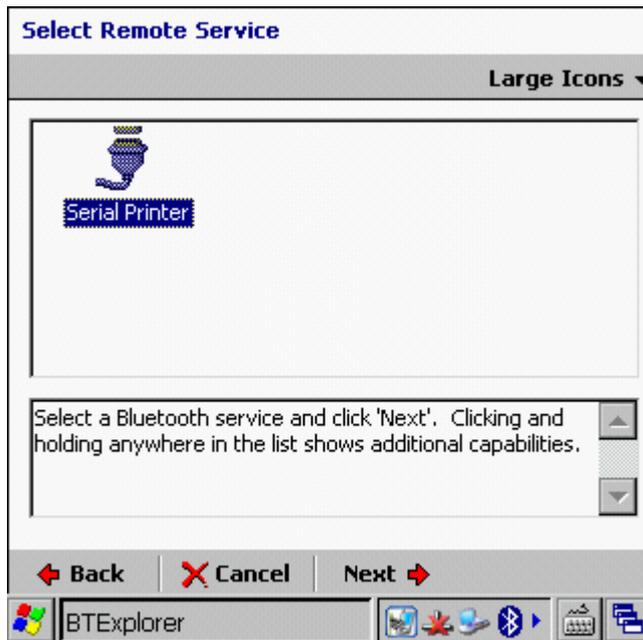

Tap “Next ->”

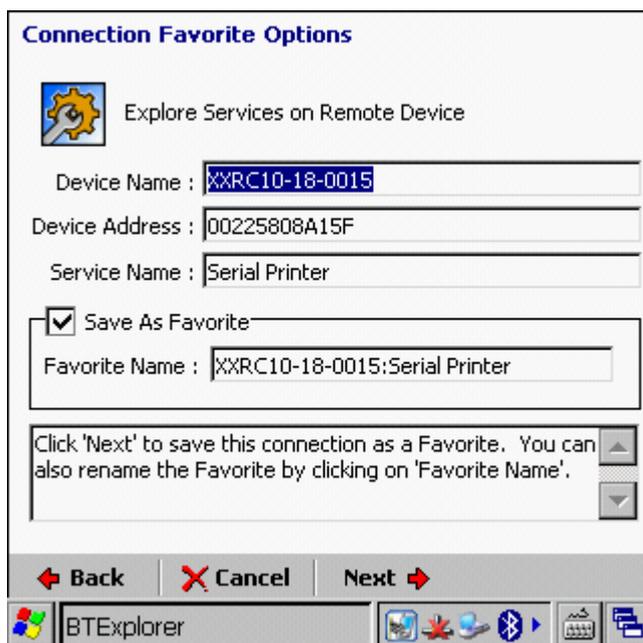

Ensure "Save As Favourite" is selected. Tap "Next ->".

Connection Summary

Explore Services on Remote Device

Device Name : XXRC10-18-0015

Device Address : 00225808A15F

Service Name : Serial Printer

Service Type : Serial Port

Favorite Name : XXRC10-18-0015:Serial Printer

Click the 'Connect' button to finish, or click the 'Back' button to change options or cancel.

Back Connect Next

BTExplorer

Tap "Connect"

Remote Service Connection

Connection Information...

Address : 00225808A15F

Device Name : XXRC10-18-0015

Service Name : Serial Printer

Service Type : Serial Port

Local Device Port Information

COM Port : COM5


Baud Rate : 57600

Port Options : No Flow Control

OK Cancel

BTExplorer

Make note of the COM Port (default COM5). Tap "OK".

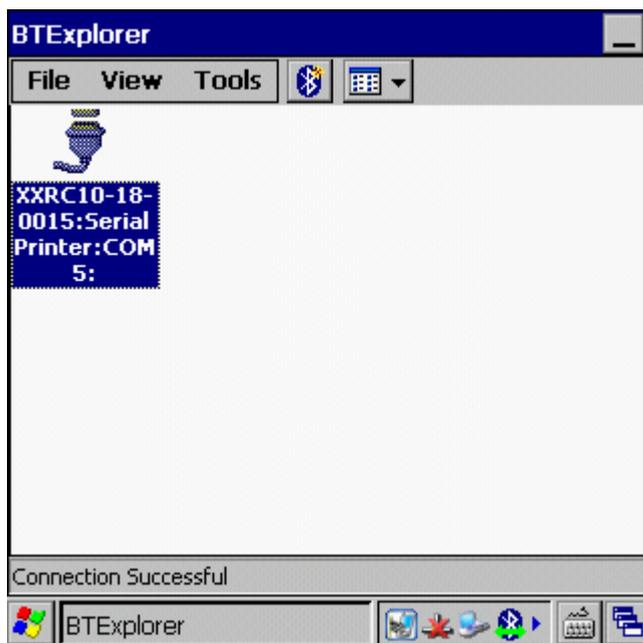

The screen above shows a successful connection and device saved as a favourite.